





Digital Displays

Display Options

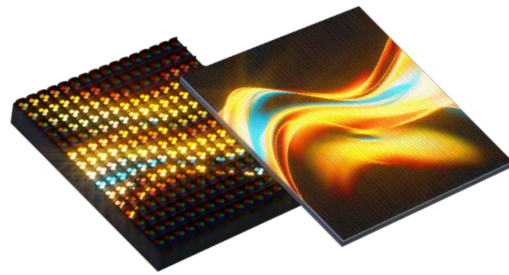


They differ in the type of LED modules and pixel pitch. There are two types of modules available – SMD and DIP.

Selected individually to order. All modules are waterproof.



SMD

The modules are compact, as the LEDs are assembled in one cell. The picture looks good even at close range.



DIP

Bright modules to achieve greater image contrast during the day.

Pixel Pitch

	P10	P8	P6	P5	P4
It's the density of pixels relative to each other. The smaller the step, the sharper the image.					
Optimal viewing distance	from 10 m	from 8 m	from 6 m	from 5 m	from 4 m
Module type	SMD / DIP		SMD		
Purpose	Outdoor			Outdoor / Indoor	



All internal electronic components are grounded



Operation in the temperature range from -40 to 50 °C



Electrical wiring is made according to electrical installation rule



Waterproofed system unit



or



Product List


	Dimension (ou équivalent)	Pitch	Brightness	Refresh rate	Average power consumption	Maximum power consumption
1 Mural						
1.1 Mural Simple face	960 × 1760 mm	P 4	5500	1920 Hz	620 watt	1 550 watt
	960 × 1728 mm	P 6	5000	1920 Hz	620 watt	1 550 watt
2 Totem LED						
2.1 Totem LED Simple face	960 × 1760 mm	P 4	5500	1920 Hz	620 watt	1 550 watt
	960 × 1728 mm	P 6	5000	1920 Hz	630 watt	1 575 watt
2.2 Totem LED Recto/verso	960 × 1760 mm	P 4	5500	1920 Hz	1 240 watt	3 100 watt
	960 × 1728 mm	P 6	5000	1920 Hz	1 260 watt	2 520 watt
3 Scellé (type sucette)						
3.1 Simple face scellé (type sucette)	960 × 1760 mm	P 4	5500	1920 Hz	620 watt	1 550 watt
	960 × 1728 mm	P 6	5000	1920 Hz	630 watt	1 575 watt
3.2 Double face scellé (type sucette)	960 × 1760 mm	P 4	5500	1920 Hz	1 240 watt	3 100 watt
	960 × 1728 mm	P 6	5000	1920 Hz	1 260 watt	2 520 watt
4 Scellé						
4.1 Simple face scellé	2240 × 1600 mm	P 4	5500	1920 Hz	1 260 watt	3 150 watt
	2304 × 1536 mm	P 6	5000	1920 Hz	1 345 watt	3 360 watt
4.2 Double face scellé	2240 × 1600 mm	P 4	5500	1920 Hz	2 520 watt	6 300 watt
	2304 × 1536 mm	P 6	5000	1920 Hz	2 690 watt	6 720 watt
4.3 Simple face scellé	2880 × 1920 mm	P 4	5500	1920 Hz	1 930 watt	4 820 watt
	2880 × 1920 mm	P 6	5000	1920 Hz	1 950 watt	4 920 watt
4.4 Double face scellé	2880 × 1920 mm	P 4	5500	1920 Hz	1 930 watt	4 820 watt
	2880 × 1920 mm	P 6	5000	1920 Hz	1 950 watt	4 920 watt
4.5 Simple face scellé	3200 × 2400 mm	P 4	5500	1920 Hz	2 680 watt	6 700 watt
	3264 × 2304 mm	P 6	5000	1920 Hz	2 700 watt	6 750 watt
4.6 Double face scellé	3200 × 2400 mm	P 4	5500	1920 Hz	5 360 watt	13 400 watt
	3264 × 2304 mm	P 6	5000	1920 Hz	5 400 watt	13 500 watt
5 Mural						
5.1 Mural	2240 × 1600 mm	P 4	5500	1920 Hz	1 260 watt	3 150 watt
	2304 × 1536 mm	P 6	5000	1920 Hz	1 345 watt	3 360 watt
5.2 Mural	2880 × 1920 mm	P 4	5500	1920 Hz	1 930 watt	4 820 watt
	2880 × 1920 mm	P 6	5000	1920 Hz	1 950 watt	4 920 watt
5.3 Mural	3200 × 2400 mm	P 4	5500	1920 Hz	2 680 watt	6 700 watt
	3264 × 2304 mm	P 6	5000	1920 Hz	2 700 watt	6 750 watt
5.4 Mural	4800 × 2560 mm	P 8	5500	1920 Hz	4 300 watt	10 750 watt

1 Mural

1.1 Mural Simple face



Double face

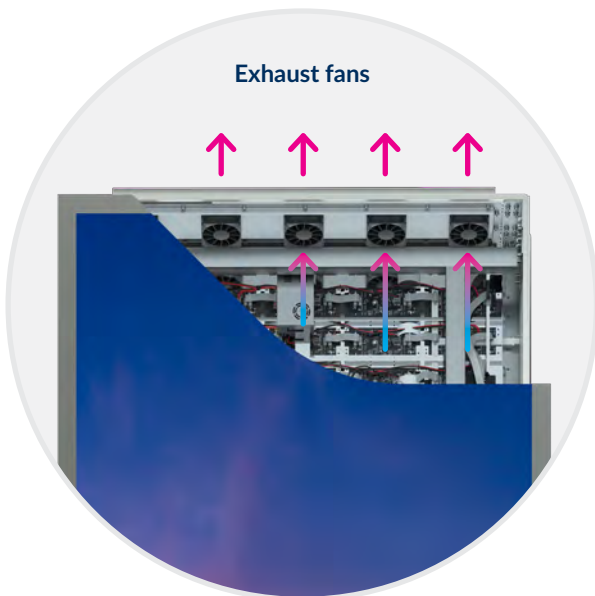

1.1 Mural Simple face

960 × 1760 mm



960 × 1728 mm

2 Totem LED



2.1 Totem LED Simple face

2.2 Totem LED Recto/verso

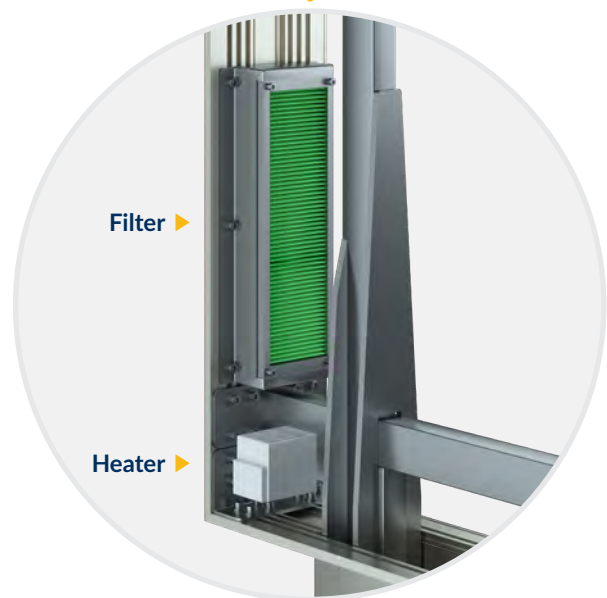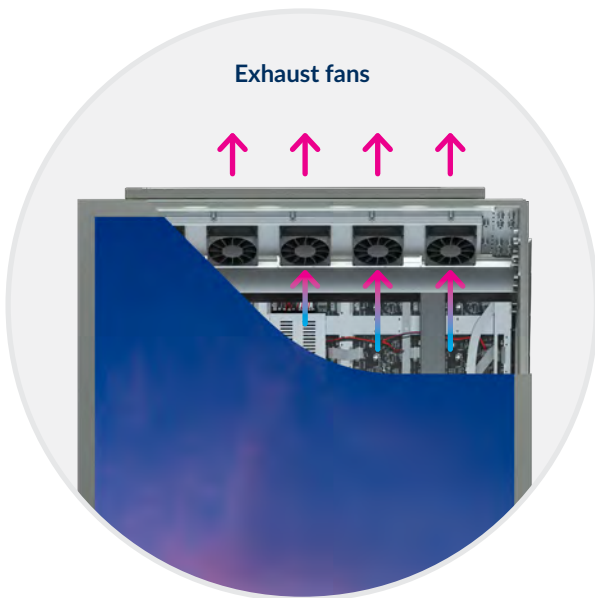

2.1 Totem LED Simple face

960 × 1760 mm

960 × 1728 mm

2.2 Totem LED Recto/verso

960 × 1760 mm

960 × 1728 mm

3 Scellé (type sucette)

Center pole design





Flag design



3.1 Simple face scellé (type sucette)



3.2 Double face scellé (type sucette)

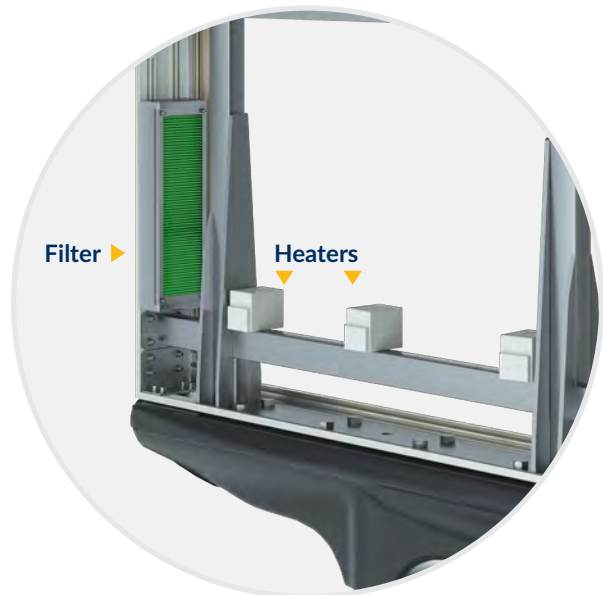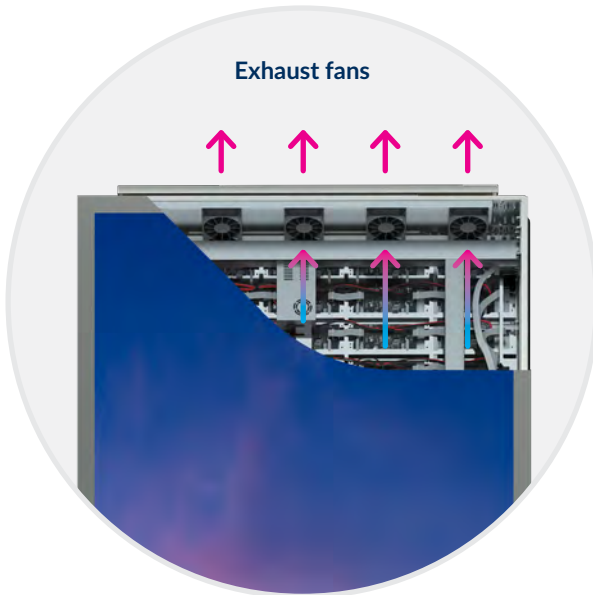

3.1 Simple face scellé (type sucette)

960 × 1760 mm

960 × 1728 mm

3.2 Double face scellé (type sucette)

960 × 1760 mm

960 × 1728 mm

4 Scellé



4.1 Simple face



4.2 Double face




4.1 Simple face scellé	2240 × 1600 mm 2304 × 1536 mm	4.5 Simple face scellé	3200 × 2400 mm 3264 × 2304 mm
4.2 Double face scellé	2240 × 1600 mm 2304 × 1536 mm	4.6 Double face scellé	3200 × 2400 mm 3264 × 2304 mm
4.3 Simple face scellé	2880 × 1920 mm		
4.4 Double face scellé	2880 × 1920 mm		

4 Scellé

Types of Distributor Box

- 1 Static
- 1 Sliding Option

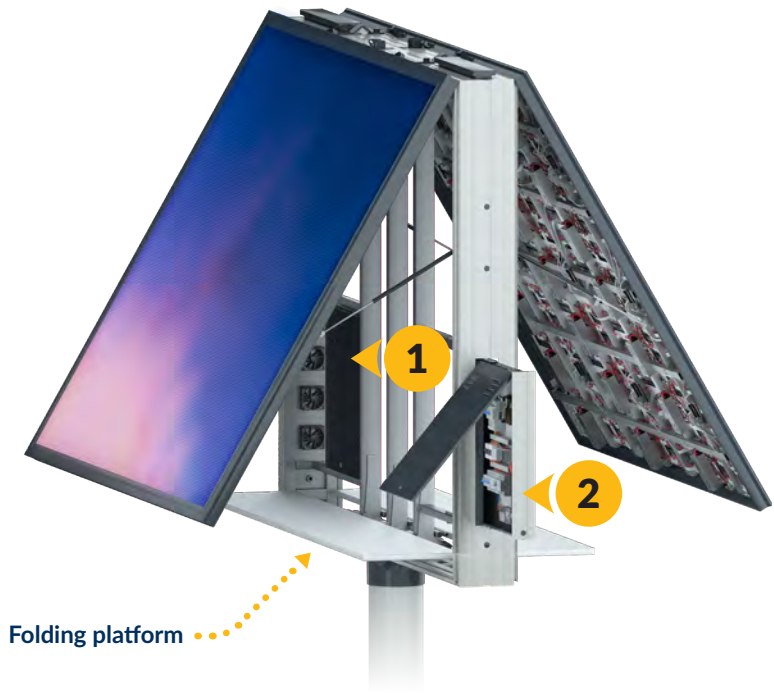

Three Types of Poles

Square pole NEW




Rectangular pole



Round pole



5 Mural

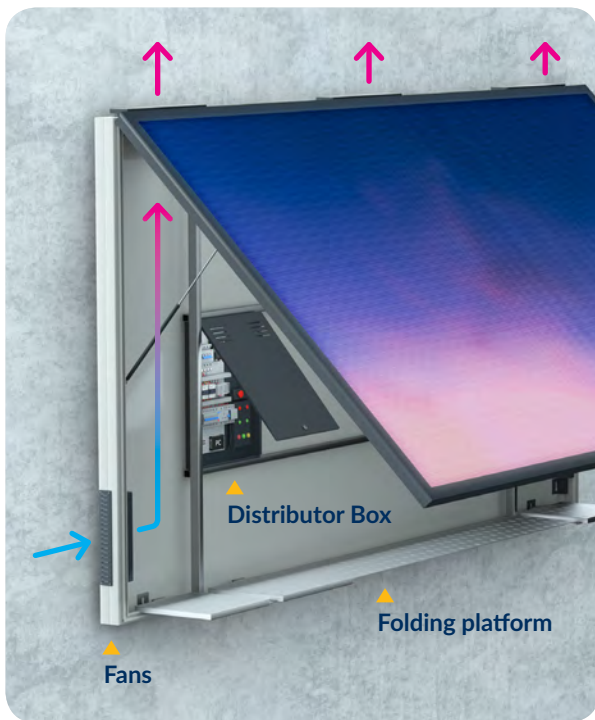

5.1 Mural 2240 × 1600 mm
2304 × 1536 mm

5.3 Mural 3200 × 2400 mm
3264 × 2304 mm

5.2 Mural 2880 × 1920 mm

5.4 Mural 2880 × 1920 mm

Extra Equipment



Auto dimming by light sensor

Depending on the illumination, automatically adjusts the LED brightness level.



Sound system

Adds the ability to output sound to the content being broadcast on the digital display.



Video surveillance system

Allows you to monitor the screen remotely and control the content of the broadcast.



LED display internal volume heating system

Required to use the LED display in particularly cold climates.



Electricity metering unit

May be with manual readout or with automatic sending to the power supply company.



Ambient temperature sensor

Allows you to display information about the current outdoor temperature.



Equipment for communication via Wi-Fi and mobile networks

Allows you to configure a wireless connection to your screen management system, including 3G and 4G (LTE) networks.